

产品说明

DLK-5020

40

应用领域



原子吸收分光
光度计控温



旋转蒸发
仪冷凝



高压均质机
控温



超声破碎




发酵罐




萃取

降温曲线

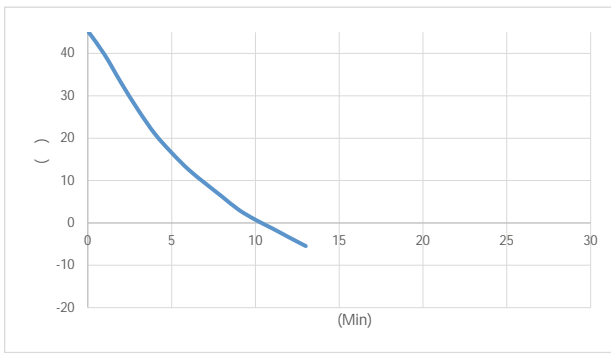

泵压流量曲线

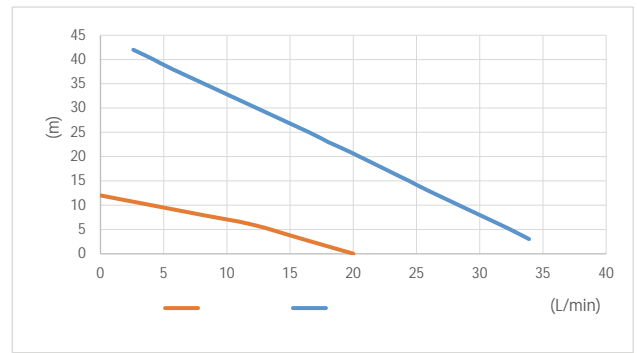

产品特点

清晰 7

安静

紧凑

环保

计时

自启

安全

广泛

技术参数

型号	DLK-5020	DLK-5020G	DLK-5020GR
温控精度	± 2	± 2	± 0.1
最大流量 L/min	20	30	30
最大泵压 bar	1.2	4	4
制冷量 kW	45	4.5	
	25	3.8	
	10	2.2	
	0	1.35	
	-5	1.05	
	-10	/	
	-20	/	
冷却温度范围	-5~45		
显示分辨率	0.1		
填充容积 L	20		
接管尺寸	G1/2		
噪声 dB	65		
重量 kg	64		
外形尺寸 mm	447*553*960 W*L*H		
总功率 kW	1.2	1.5	1.5
电源	220V/50Hz~1		